
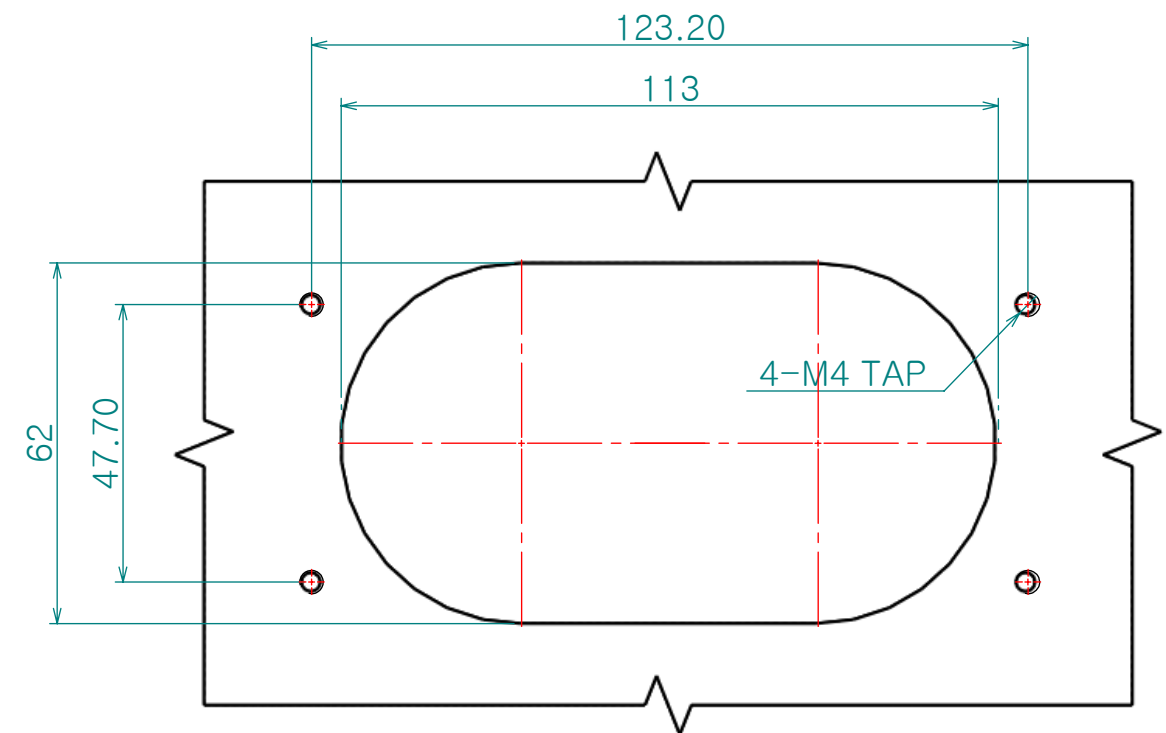
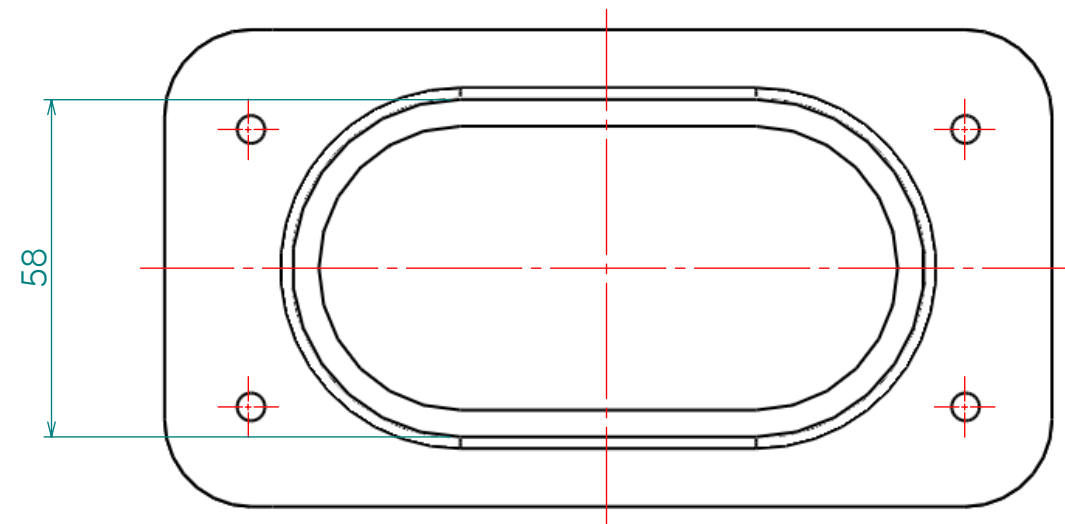
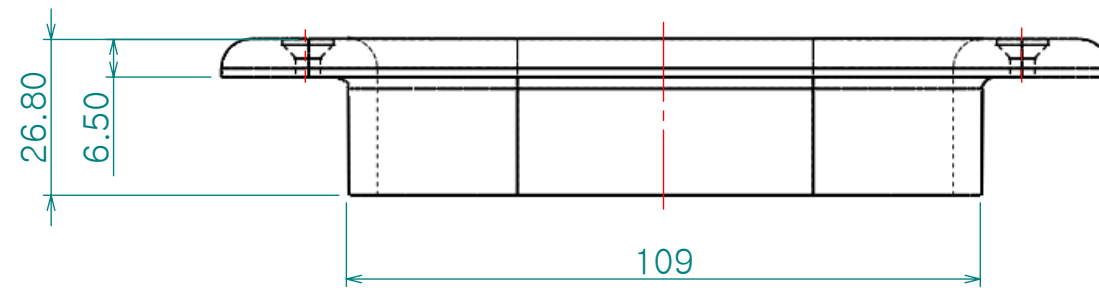
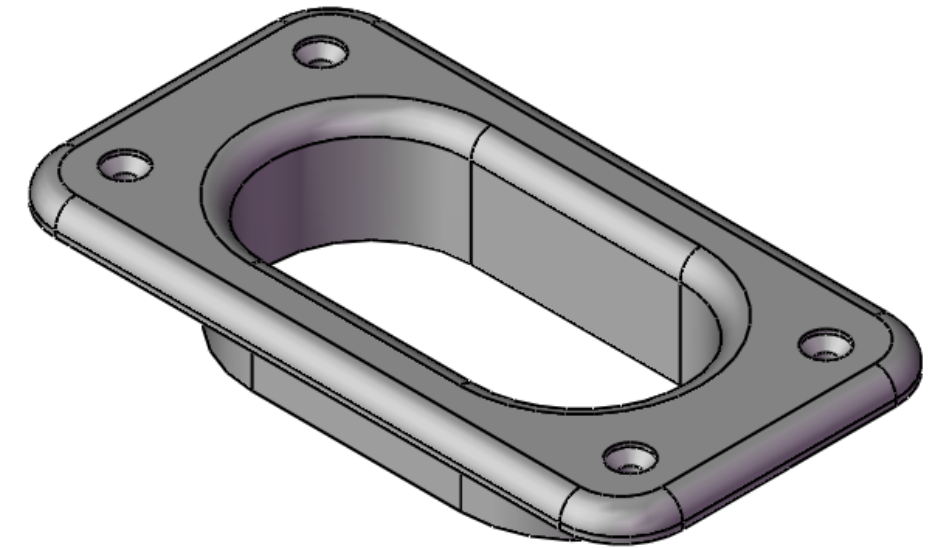
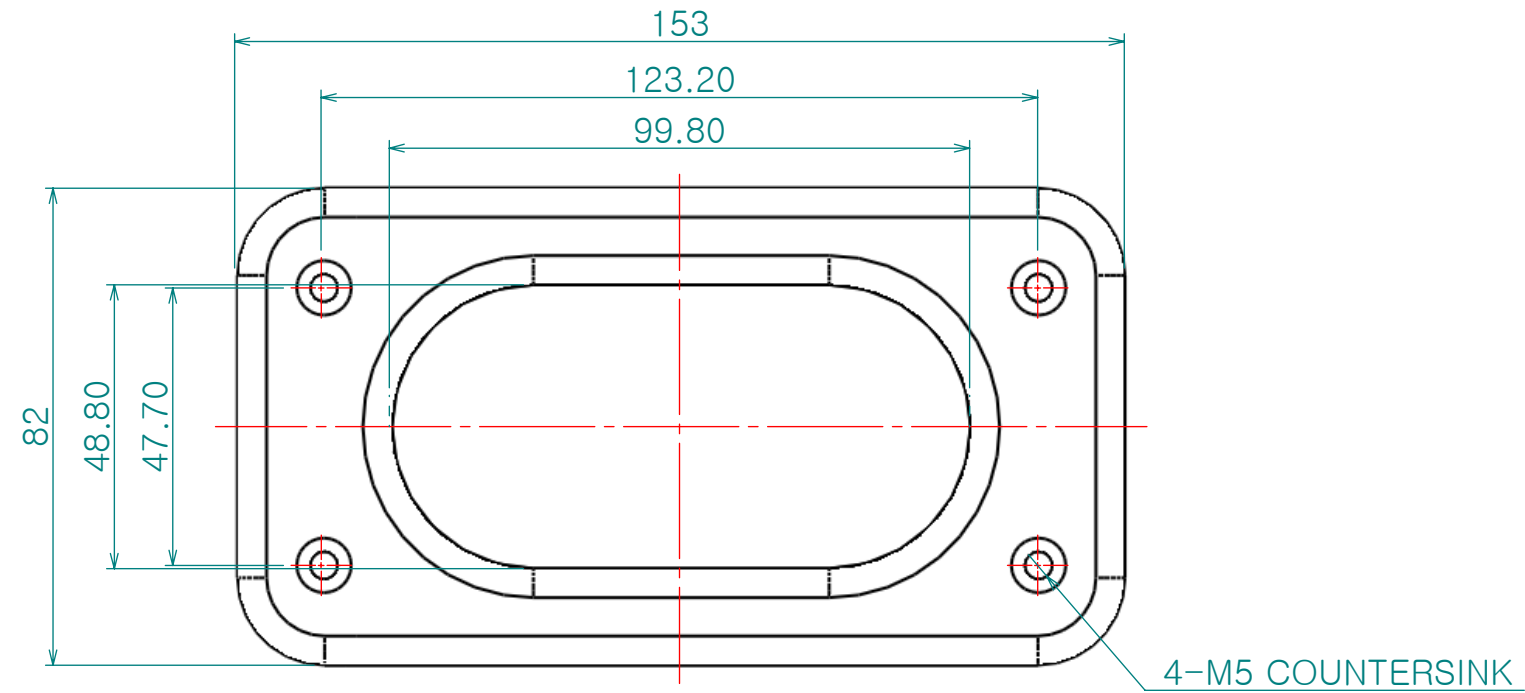




## PANEL DRILLING DIMENSIONS.

## 2. 용도 :

|                   |           |                           |                                |                                                                                       |                                                                                       |
|-------------------|-----------|---------------------------|--------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Dimension<br>(mm) | Precision | Material<br><b>STS316</b> |                                | Dwg. No.                                                                              | Q'TY<br>*EA                                                                           |
| 0.5~3<br>3~6      | ±0.05     | Finish<br><b>광택연마</b>     |                                | Part Name.<br><b>**</b>                                                               | Weight<br>-                                                                           |
| 6~30              | ±0.1      | Revision<br>-             | Sheet Size<br><b>A3</b>        | Ass'y Name<br><b>**</b>                                                               | Scale<br>1:1.3                                                                        |
| 30~120            | ±0.15     | Date<br>2010-04-21        | Designed by<br><i>Shin S H</i> | Model No.<br><b>CM-D1054-02</b>                                                       |  |
| 120~315           | ±0.2      | Checked by                | Approved by                    |  |                                                                                       |
| 315~1000          | ±0.3      |                           |                                |                                                                                       |                                                                                       |
| 1000~2000         | ±0.5      |                           |                                |                                                                                       |                                                                                       |
| KS B 0412에 준함     |           |                           |                                |                                                                                       |                                                                                       |