




[illegible]

Technical drawing of a U-shaped mechanical part. The overall height is 30.5. The top flange has a thickness of 12. The inner radius is 6 (indicated by $\phi 6$). The outer radius is 10 (indicated by $\phi 10$). The part is secured with two M4 screws (labeled 2-M4 S/C). The distance from the center of the screws to the inner edge of the flange is 22. The distance from the center of the screws to the outer edge of the flange is 2.5. The total width of the part is 12. The overall width of the assembly is 1.

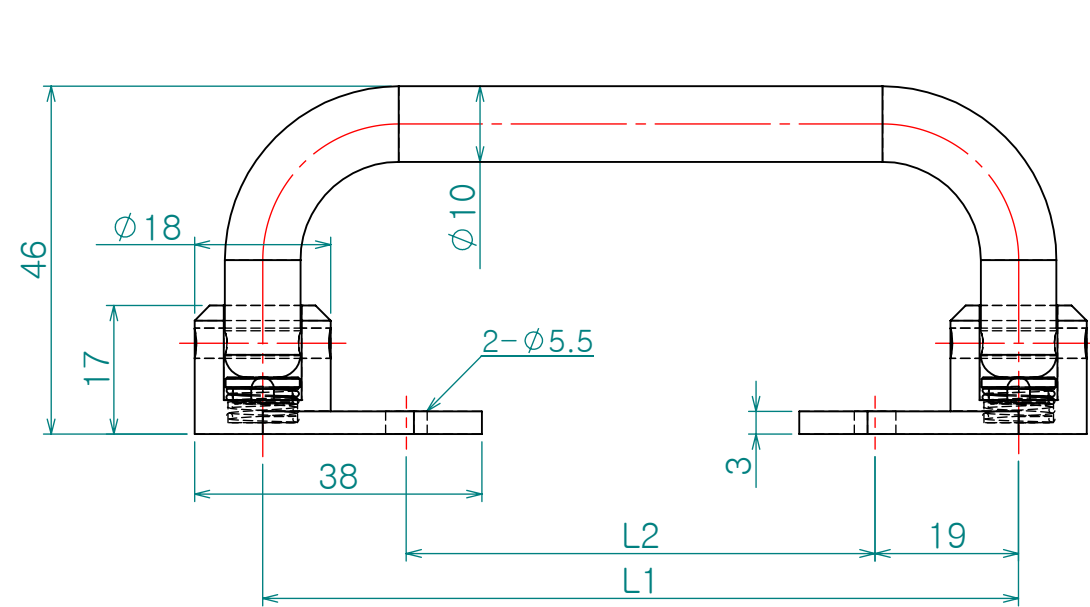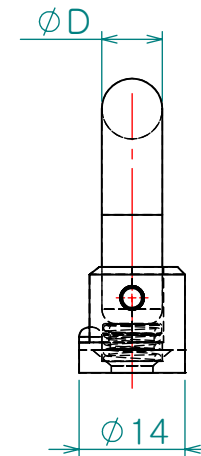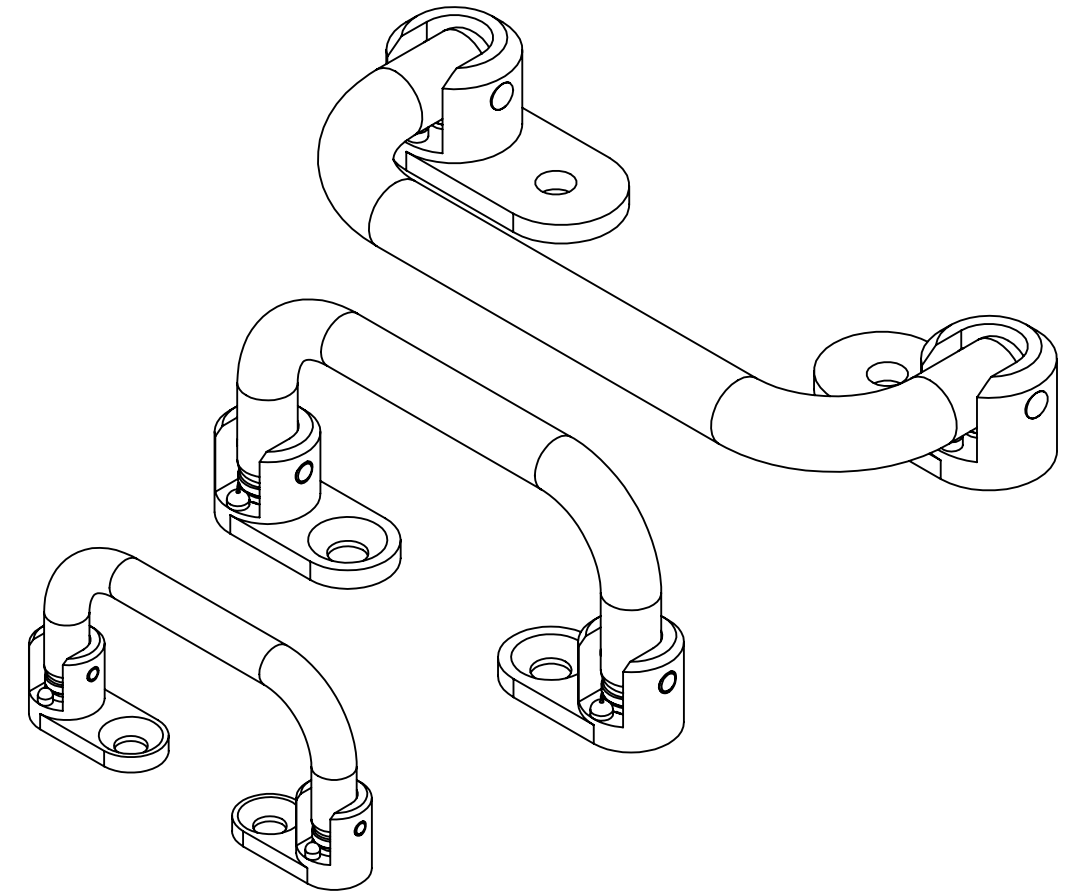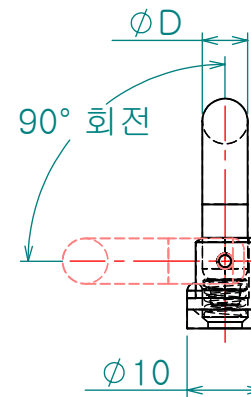

제 품 명	L1	L2	∅D
CA-1027-S1	50	26	6
CA-1027-S2	75	51	
CA-1027-S3	90	66	
CA-1027-M1	68	38	8
CA-1027-M2	90	60	
CA-1027-M3	100	70	
CA-1027-M4	110	80	
CA-1027-M5	120	90	
CA-1027-1	100	62	10
CA-1027-2	120	82	
CA-1027-3	180	142	

Dimension (mm)	Precision	Material STS304		Dwg. No.	Q'TY **
0.5~3 3~6	±0.05	Finish 광택연마		Part Name. **	Weight -
6~30	±0.1	Revision -	Sheet Size A3	Ass'y Name **	Scale 1:1
30~120	±0.15				
120~315	±0.2				
315~1000	±0.3	Date 2017-03-28	Designed by Shin S H	Model No. CA-1027	
1000~2000	±0.5	Checked by	Approved by		
KS B 0412에 준함					

2. 용도 :

※ CA-1027-S1,2,3