




Re. No.	DESCRIPTION	DATE	DS.	CH.	AP.
△					
△					
△					




B - Black




G - Green





R - Rad



O - Orange



W - White

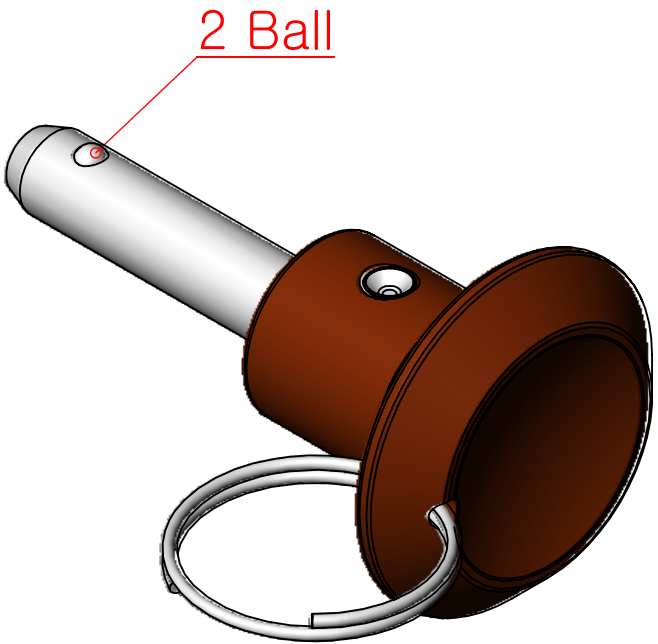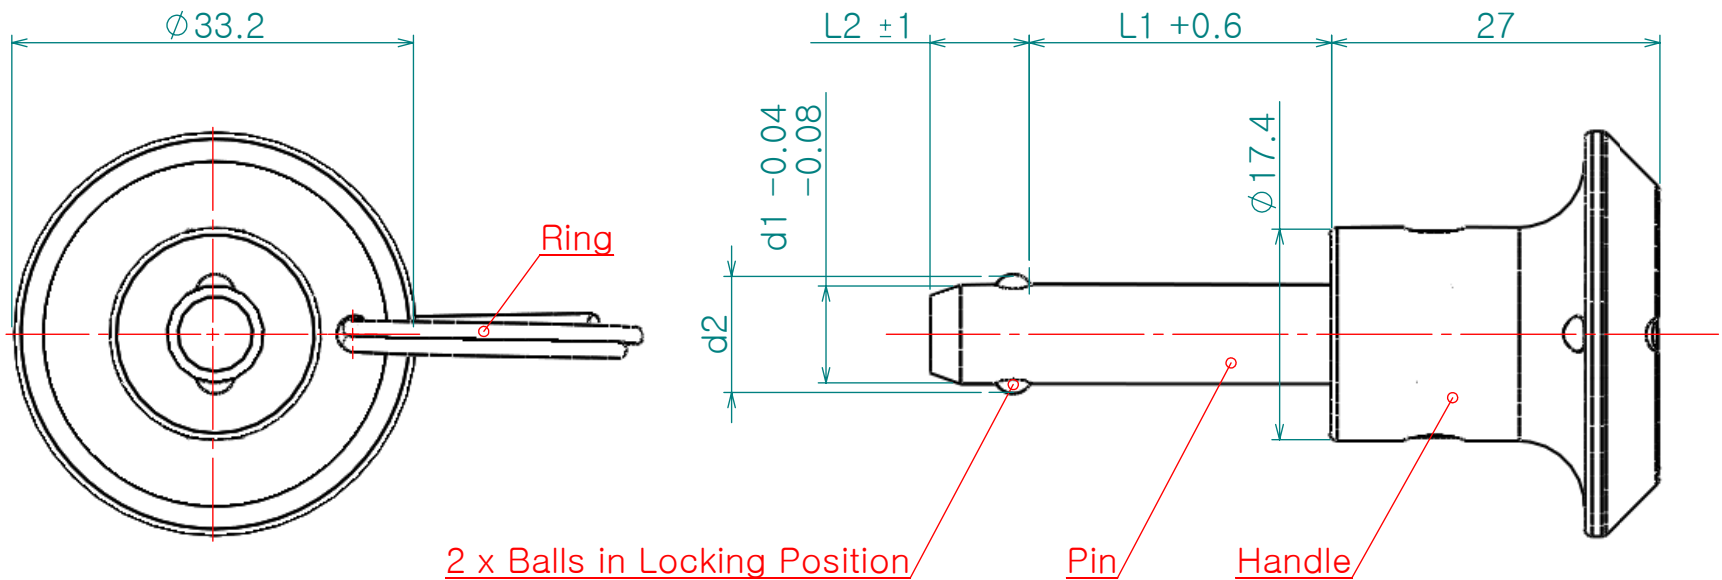


제 품 명	L (선택)	d1	L1	d2	L2
CS-P010-5L	10, 15, 20, 25, 30	5	20	5.5	6
CS-P010-6L	10, 15, 20, 25, 30, 35, 40, 45, 50	6	25	7	7
CS-P010-8L	20, 25, 30, 35, 40, 45, 50	8	30	9.6	8.2
CS-P010-10L	20, 25, 30, 35, 40, 45, 50, 60	10	35	12	9.6
CS-P010-12L	25, 30, 35, 40, 45, 50, 60, 70, 80	12	40	14.5	10.6

※ 재 질 : Handle - 나일론 (PA 6)
Pin - 스테인리스

※ Handle 부 색상- B - Black
G - Green
R - Rad
O - Orange
W - White

※ 선택사항
연결체인 (CS-PLC) 참조.

Dimension (mm)	Precision	Material		Dwg. No.	Q'TY
0.5~3	±0.05	-		Part Name.	**
3~6		Finish			Weight
6~30	±0.1	-		Ass'y Name	-
30~120	±0.15	Revision	Sheet Size		Scale
120~315	±0.2	-	A3		1.6:1
315~1000	±0.3	Date	Designed by	Model No.	
1000~2000	±0.5	2017-09-14	<i>Shin S H</i>	CS-P010	
KS B 0412에 준함		Checked by	Approved by		